




# Selection Guide

## 15" Industrial TFT Panel Monitor

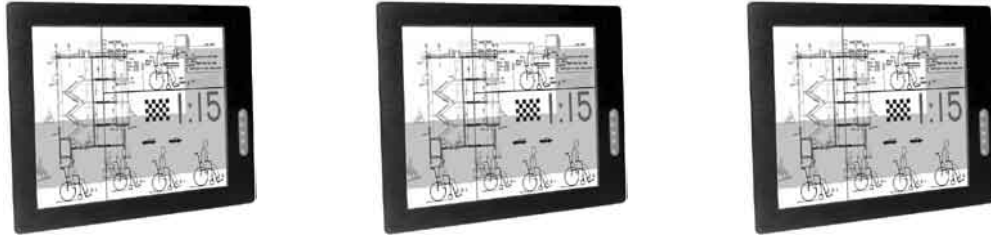

	AT-IP15	AT-IP15TS	AT-IP15TU
<b>Specification</b>			
<b>Display</b>			
Display Type	15" XGA TFT LCD		
Resolution	1024 (H) x 768 (V)		
Pixel Pitch	0.297 (H) x 0.297 (V) (mm)		
Display Color	16M		
Brightness	250 cd/m <sup>2</sup>		
Contrast Ratio	450:1		
Viewing Angle	L/R:120°, U/D:100°		
Response Time	16 (Tr+Tf) (ms)		
Back Light MTBF	50,000 (hour)		
Construction	Aluminium chassis with VESA 75/ 100mm standard screw holes		
OS Support	MS DOS, Windows 98/SE, Windows NT4.0, Windows 2000, Windows XP		
Menu OSD	Yes		
Remote control	(Optional)		
<b>I/O</b>			
Power Input	External 48WDC 12V power adapter		
Audio input	Line-in		
Video input	15 pin D-SUB, AV input		
<b>Touch Screen</b>			
Type	Five-wire Analog resistive		
Controller	RS-232	USB	
Resolution	continuous		
Light transmission	79%or more		
Power consumption	<5V @100Ma		



**Industrial Monitor**

**15" Industrial TFT Panel Monitor**

15"

16M

250 cd/m<sup>2</sup>



Display	
Display Type	15" XGA TFT LCD
Resolution	1024 (H) x 768 (V)
Pixel Pitch	0.297 (H) x 0.297 (V) (mm)
Display Color	16M
Brightness	250 cd/m <sup>2</sup>
Contrast Ratio	450:1
Viewing Angle	L/R:120°, U/D:100°
Response Time	16 (Tr+Tf) (ms)
Back Light MTBF	50,000 (hour)
Construction	Aluminium chassis with VESA 75/ 100mm standard screw holes
OS Support	MS DOS, Windows 98/SE, Windows NT4.0, Windows 2000, Windows XP
Menu OSD	Yes
Remote control	(Optional)
I/O	
Power Input	External 48WDC 12V power adapter
Audio input	Line-in
Video input	15 pin D-SUB, AV input (Optional)
Touch Screen (Optional) (AT-IP-15T)	
Type	Five-wire Analog resistive
Controller	RS-232 (AT-IP15TS) USB (AT-IP15TU)
Resolution	continuous
Light transmission	79%or more
Power consumption	<5V @100Ma
Mechanical and Environmental	
Operating temperature	0 °C~ 45°C(32°F~ 113°F)
Storage temperature	-20°C~60°C(-4°F~ 140°F)
Storage humidity	10% ~ 95%@40°C,Non-condensing
Vibration	10 ~ 150Hz, 0.15mm10 cycles 1G
Shock	30G peak acceleration (11 msec. duration)
Dimensions	409 x 300.8 x 47.8mm
Gross Weight	7.6 (kg)

Order Information	
AT-IP-15	15" Industrial TFT Panel Monitor 4:3
AT-IP-15TS	15" Industrial TFT Panel Monitor, Touch Screen, RS232
AT-IP-15TU	15" Industrial TFT Panel Monitor, Touch Screen, USB
Option	
AT-IP-EXAV	AV Connector instead serie

**DRAWING**

