



Features


- Fanless
- Intel® Atom™ N270 1.6GHz processor
- IP 65 compliant except I/O side
- Resistive or GFG touch for option
- DC 11~32V wide-range power input



Specifications

System	
Processor	Intel® Atom™ N270 1.6GHz processor built-in, FSB 533 MHz
System Memory	1 x 200-pin 400/533 MHz SO-DIMM slot up to 2GB, default 1GB/533 MHz
System Chipset	Intel® 945GSE + ICH7M
External I/O Port	Standard I/O: <ul style="list-style-type: none"> • 4 x USB 2.0 connector • 2 x RJ-45 LAN connector • 1 x DB-9 RS232 (COM 1) • 1 x DB-9, COM2 (RS-232/422/485 selection, default RS-232) • 1 x DB-15 VGA • 1 x MIC, LINE-Out, LINE-in • 1 x Power Switch (ATX) • 1 x 3-pin DC Power input terminal
Storage	<ul style="list-style-type: none"> • 1 x 2.5" SATA HDD • 1 x CF slot (internal)
Expansion Slots	None
OS Support	Windows® XP Pro, XP Embedded, Windows® 7
LCD	
Display Type	19" TFT-LCD
Max. Resolution	1280x1024
Max. Color	16.2M
Luminance (cd/m²)	300
View Angle	H:160° / V:160°
Backlight Lifetime	50,000 hrs
Touch Screen	
Type	Analog resistive (optional)
Light Transmission	80%
Power Supply	
Power Input	DC 11~32V

Dimension

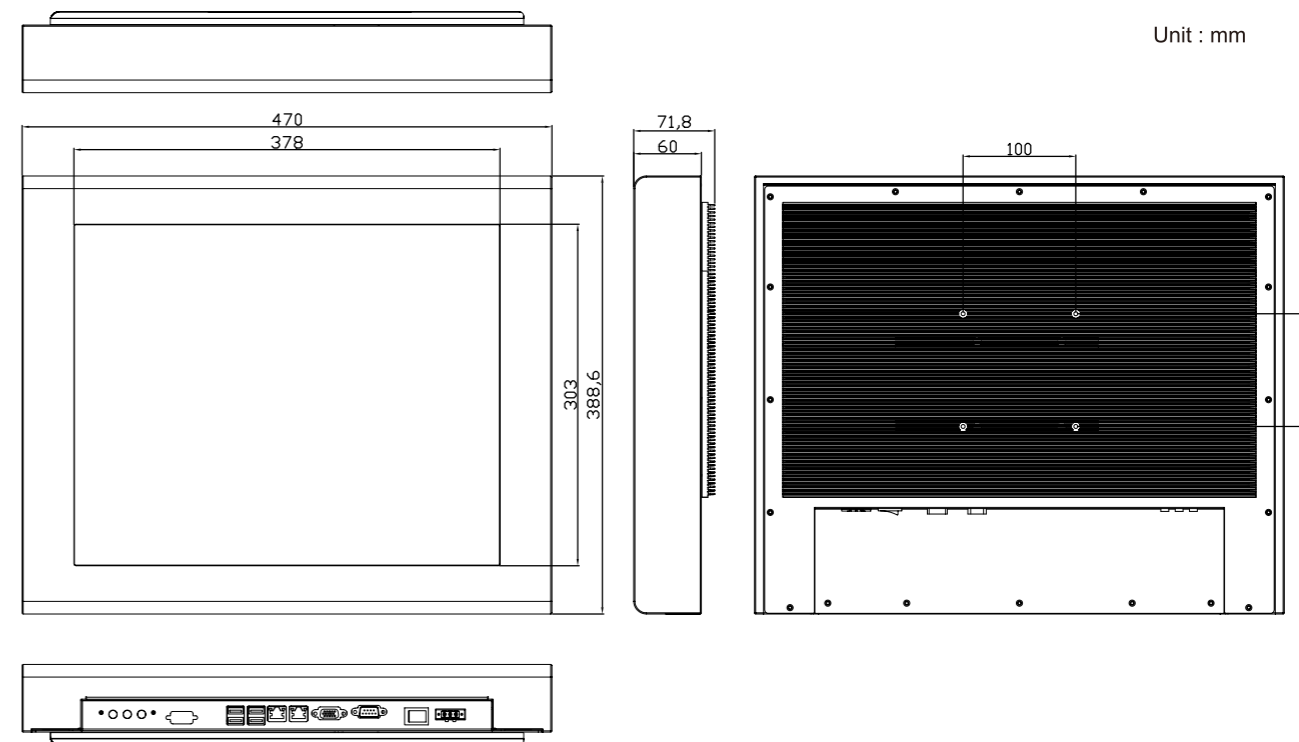

Mechanical	
Construction	Stainless steel front bezel and aluminum extrusion back cover
IP Rating	IP 65 except I/O side
Mounting	Panel / VESA 100x100 Mount
Dimension	470(W)x388.6(H)x71.8(D)mm
Net Weight	10.5 kgs
Environmental	
Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C, non-condensing
Certificate	Meet CE/FCC Class A
Ordering Information	
APC-3984	19" Intel® Atom™ N270 1.6GHz ultra slim IP 65 stainless steel fanless panel PC
APC-3984T	19" Intel® Atom™ N270 1.6GHz ultra slim IP 65 stainless steel fanless panel PC w/Touch screen