



### Features



- 8" LED Backlight TFT LCD with resolution of 800x600
- Steel Chassis
- Resistive touch screen (optional)
- VGA input , DC 12V power jack with locker
- DVI-D and wide range DC 11~32V terminal block power input for option



### Specifications

LCD	
Display Type	8" SVGA (800x600) color TFT LCD
Max. Resolution	800x600
Max. Colors	262K
Luminance (cd/m <sup>2</sup> )	350
Viewing Angle	H:130° / V:110°
Backlight Lifetime	40,000hrs


System	
Input Signal	RGB analog
On Screen Display Control	Five button at rear side
External I/O Port	Default I/O: VGA + 12V DC Power Jack with locker Option 1 I/O: VGA+ 11~32V TB connector. Option 2 I/O: VGA+DVI-D+11~32V DC TB connector

Power Supply	
Power Input	DC 12V

Touch Screen	
Type	Resistive touch
Light Transmission	80%

Mechanical	
Construction	Steel Chassis
Mounting	Panel Mount / VESA Mount 75x75
Dimension	208X148X42 mm
Net Weight	1.2 kg

### Dimension

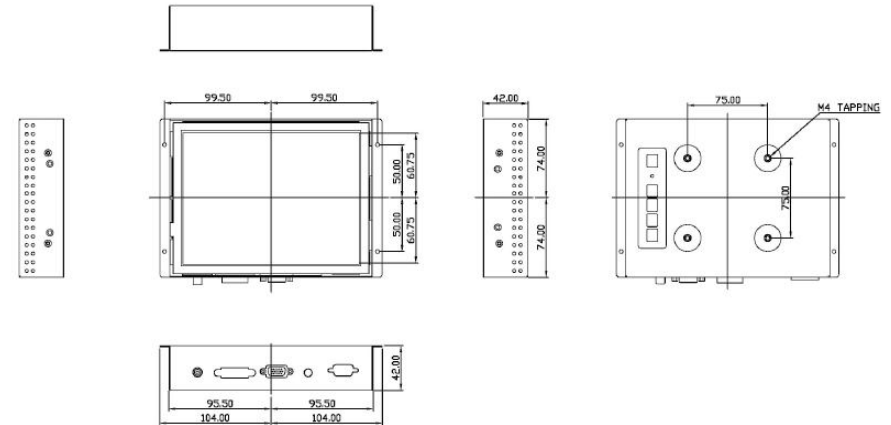

Environmental	
Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C Non-condensing, without touch screen
Certificate	CE/FCC Class A

Ordering Information	
OPD-1086A	8" LED 800x600 Open frame LCD monitor
OPD-1086AT	8" LED 800x600 Open frame LCD monitor with resistive touch